

Special solutions




Special feature:

- Staggered power supply input
- For application of several heated lines to the introduction in cabinets we mounted a small metal sleeve



- **Protective metal conduit with aluminium-adapter**
Temperature > 200°C with metallic-adapter

- **Replaceable adapter** with silicone cap
- PTFE – tube 6x1,0mm or 8x1,0mm replaceable
- Max. pressure up to 2,5bar at 200°C

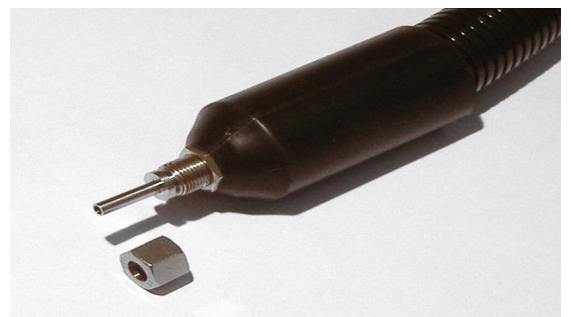


- Heating of a sterilization spacer for pharmaceutical industry. Tmax. 200°C include PT 100 and connection plug



- Junction box with two Amphenol-plugs



- Gas-Switch-Box –heat up to 180°C
8 x 3way high temperature valve

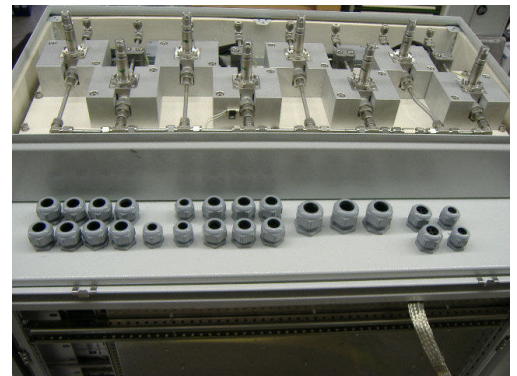

- mobil test case with probe cylinder
heat up to 200°C

